

H 13i

Compactor with smooth drum


Compactors Series H / Series H234









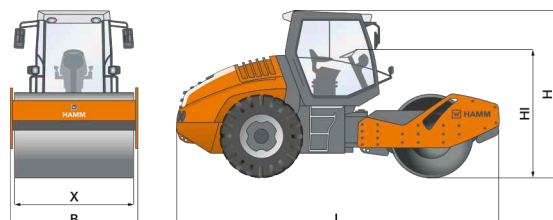


HIGHLIGHTS H

- > 3-point swivel joint for optimum driving comfort
- > Optimum ease of maintenance, long service intervals
- > Ergonomic driver seat for perfect all-round visibility
- > Excellent hill climbing ability via self-locking differential
- > Hydrostatic steering
- > Clear information display

Machine dimensions		
Total length (L)	mm	5850
Width (B)	mm	2284
Total height (H)	mm	2960
Drum width (X)	mm	2140
Height loading, min. (HI)	mm	2308



TIER 4
EU Stage IV
/ EPA Tier 4

TECHNICAL DATA		Unit	H 13i
	Weights		
	Operating weight with cab	kg	12860
	Operating weight with ROPS	kg	12600
	Operating weight, max.	kg	15870
	Axle load, front/rear	kg	7115/5745
	Static linear load, front	kg/cm	33,2
	Machine dimensions		
	Total length	mm	5850
	Total height with cab	mm	2960
	Height loading, min.	mm	2308
	Wheel base	mm	3150
	Total width with cab	mm	2284
	Ground clearance, centre	mm	390
	Turning radius, inside	mm	3870
	Angle of driving slope, front/rear	°	53/32
	Drum dimensions		
	Drum width, front	mm	2140
	Drum diameter, front	mm	1504
	Drum thickness, front	mm	30
	Drum type, front		smooth
	Wheel dimensions		
	Size of tyres, rear		AW 23.1-26 12 PR
	Diesel engine		
	Manufacturer		DEUTZ
	Version		TCD 4.1 L4
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		115,0/156,4/2300
	Power rating SAE J1349, kW/HP/rpm		115,0/154,1/2300
	Emission standard		EU Stage IV / EPA Tier 4
	Exhaust gas after-treatment		DOC-DPF-SCR
	Drive		
	Speed, infinitely variable	km/h	0 - 12,0
	Regulation, infinitely variable		Hammtronic
	Climbing ability, vibration on/off	%	52/57
	Vibration		
	Vibration frequency, front, I/II	Hz	30/36
	Amplitude, front, I/II	mm	1,93/0,89
	Centrifugal force, front, I/II	kN	249/166
	Steering		
	Oscillation angle +/-	°	10
	Steering, type		Articulated steering
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L	280
	AdBlue/DEF tank, content	L	32
	Sound level		
	Acoustic power LW(A), sticker		105
	Acoustic power LW(A), measured		103

EQUIPMENT

2 large working and rear view mirrors, 2 multiply-adjustable armrests, 3-point articulation, Storage bin, lockable, Dashboard with displays, indicator lights and function key, Automatic traction control and anti-slip control, Operating concept Easy Drive, ECO mode, Speed preselect, Cup holder, Hammtronic - electronic machine management, Hose protection on front vehicle, Vibration-isolated operator's platform, Space for cold box, Stepless hydrostatic all-wheel drive, Automatic vibration system, ROPS, rigid

OPTIONAL EQUIPMENT

Rotating seat adapter, Steering column with comfort exit and tiltable dashboard, Combination scraper for smooth drum and padfoot shells, Rotating beacon, Dozer blade, Protective roof, Padfoot shells, Auxiliary heater, Working lights, Back-up alarm (reversing), Frequency control, Radio, ROPS cabin with heating, FOPS-approved (level I), ROPS cabin with heating and air conditioning, FOPS-approved (level I), Safety belt monitoring device, Automatic engine-off function, Bonnet with electrical easy access engine cover release, Telematics interface, Vibration plate, complete, Armrest

HAMM AG
Hammstraße 1
D-95643 Tirschenreuth
Tel. +49 9631 80-0
Fax +49 9631 80-111
www.hamm.eu

